


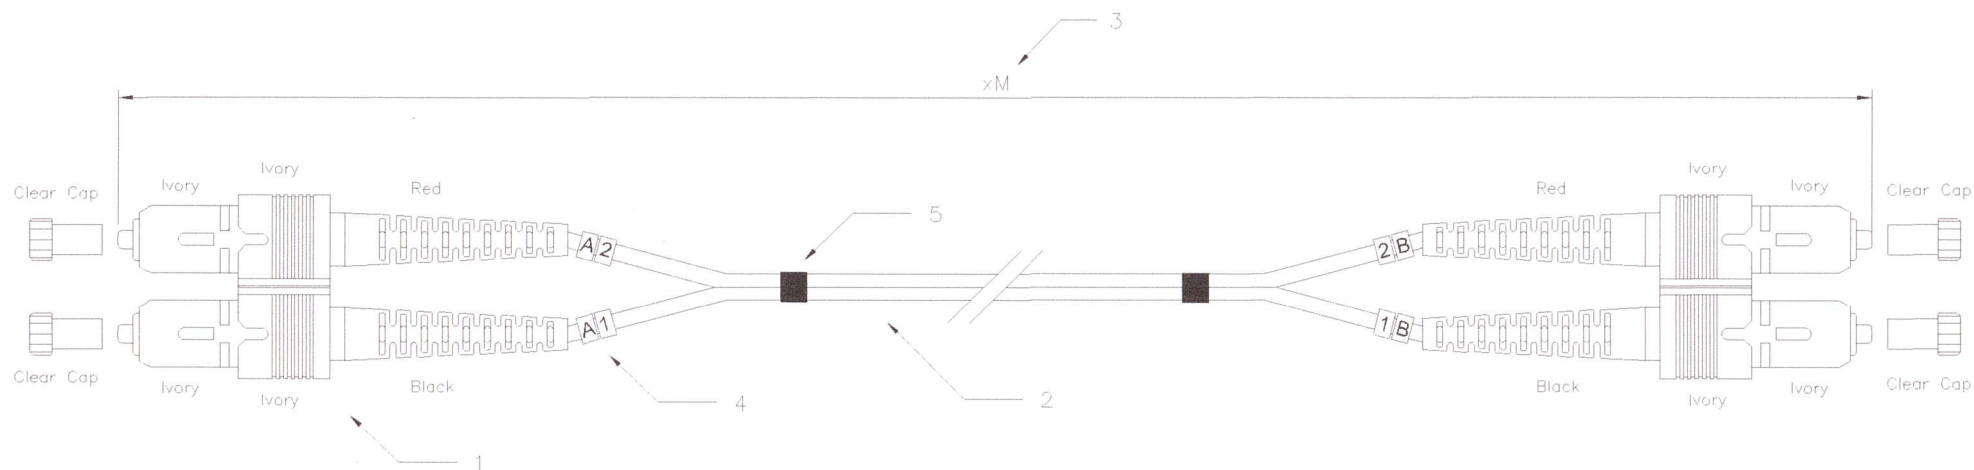


Specification:

1. Connector Type : SC/PC Multimode
2. Cable Type :
Zipcord cable, Ø3.0mm, 50/125um Multimode,
Calbe Jacket : Gray color, PVC material
3. Length : xM
4. Cable Marker
5. Shrink Tube

Performance:

- a. Insertion Loss : <0.5 dB
- b. Fiber Extention : $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c. Ferrule End-face Radius : $10 < R < 30\text{mm}$
- d. Apex Offset : < 50um
- e. Increase in insertion loss after 500 mating : 0.2 dB Max.
- f. Operation Temperature : -20° to $+70^{\circ}$
- g. Storage Temperature : -40° to $+80^{\circ}$
- h. Humidity (non-condensing) 95%RH

GENERAL TOLERANCE OF DIMENSIONS x.xxx ±0.005 x.xx ±0.05 x.x ±0.1	DRAWING		12.FEB.2004		Michelle						
	CHECK		12.FEB.2004		YTY						
	APPROVAL		12.FEB.2004		Magic						
			DATE		NAME		ITEM NO.: 13-HHM1F11-xM				
	SCALE		1/1 (A4)		UNIT		mm		DES.: SC to SC Duplex patch cord		
		DRAWING NO.		13-HHM1F11-xM(SA1)							
		DRAWING CLASSIFICATION		S		SHEET		1 OF 1			