


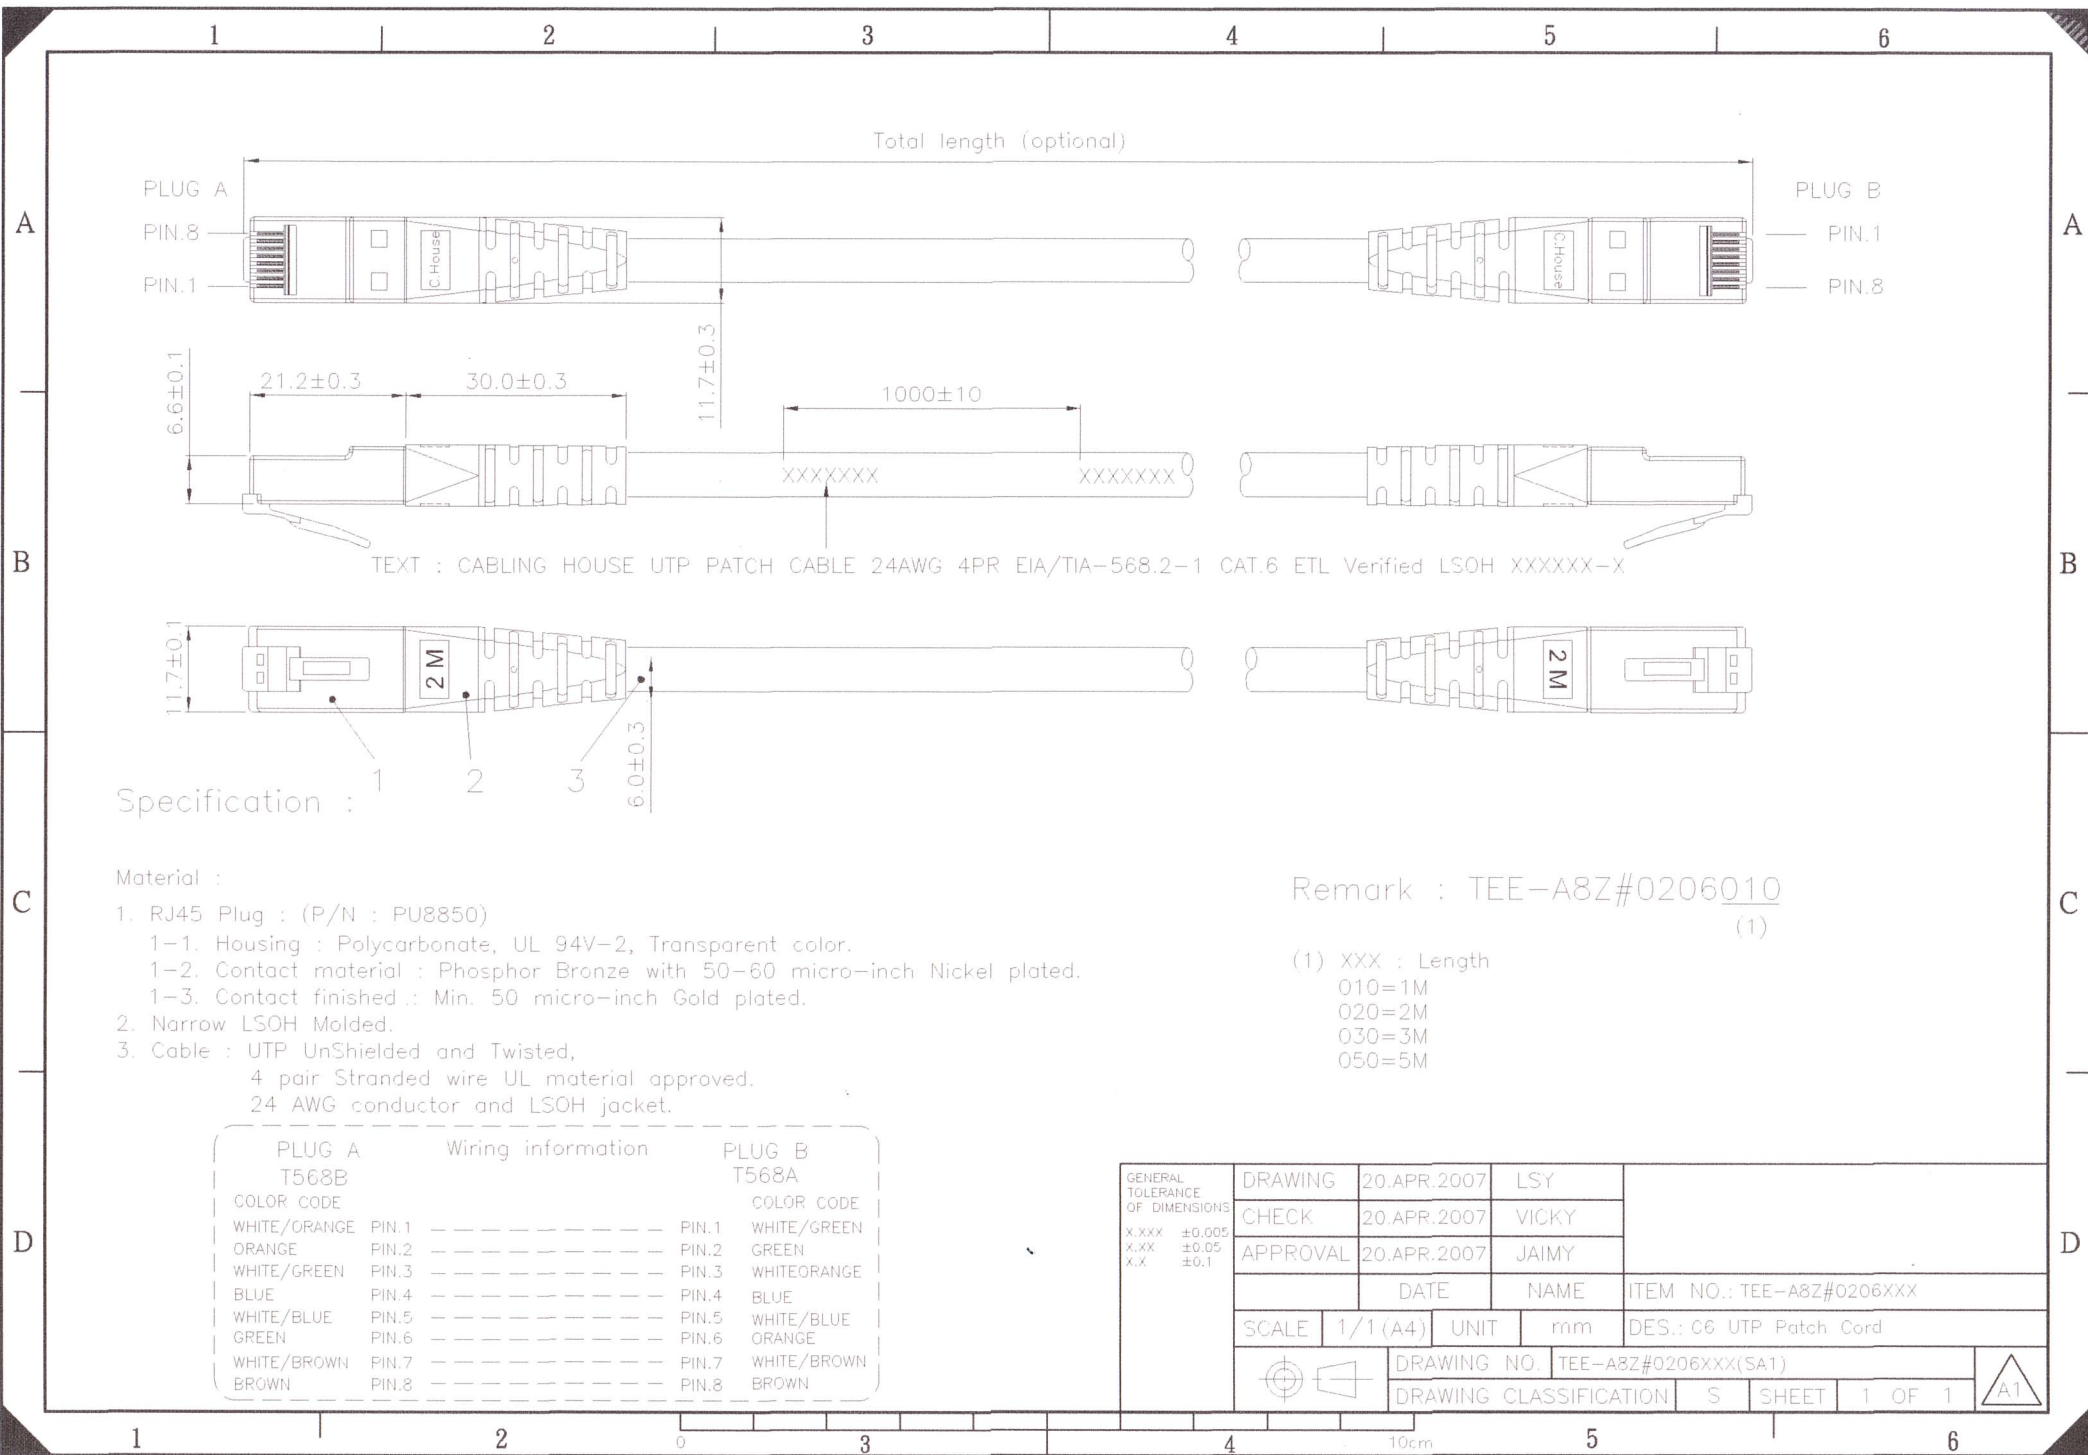

TEXT : CABLING HOUSE UTP PATCH CABLE 24AWG 4PR EIA/TIA-568.2-1 CAT.6 ETL Verified LSOH XXXXXX-X


Specification :

- Material :
1. RJ45 Plug : (P/N : PU8850)
 - 1-1. Housing : Polycarbonate, UL 94V-2, Transparent color.
 - 1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - 1-3. Contact finished : Min. 50 micro-inch Gold plated.
 2. Narrow LSOH Molded.
 3. Cable : UTP UnShielded and Twisted,
 - 4 pair Stranded wire UL material approved.
 - 24 AWG conductor and LSOH jacket.

Remark : TEE-A8Z#0206010
(1)

- (1) XXX : Length
010=1M
020=2M
030=3M
050=5M

PLUG A		Wiring information		PLUG B	
T568B				T568A	
COLOR CODE				COLOR CODE	
WHITE/ORANGE	PIN.1	---	---	PIN.1	WHITE/GREEN
ORANGE	PIN.2	---	---	PIN.2	GREEN
WHITE/GREEN	PIN.3	---	---	PIN.3	WHITE/ORANGE
BLUE	PIN.4	---	---	PIN.4	BLUE
WHITE/BLUE	PIN.5	---	---	PIN.5	WHITE/BLUE
GREEN	PIN.6	---	---	PIN.6	ORANGE
WHITE/BROWN	PIN.7	---	---	PIN.7	WHITE/BROWN
BROWN	PIN.8	---	---	PIN.8	BROWN

GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING		20.APR.2007		LSY						
	CHECK		20.APR.2007		VICKY						
	APPROVAL		20.APR.2007		JAIMY						
			DATE		NAME		ITEM NO.: TEE-A8Z#0206XXX				
SCALE		1/1 (A4)		UNIT		mm		DES.: C6 UTP Patch Cord			
		DRAWING NO.		TEE-A8Z#0206XXX(SA1)							
		DRAWING CLASSIFICATION		S		SHEET		1 OF 1			